

# GM

## series general end mills

### Wide application

High efficiency machining can be achieved ranging from common steel to pre-hardened steel machining.

### Optimized structure

Appropriate combination of sharp cutting edge and tool strength makes cutting easier and faster, extending tool life.


### Versatile product series

Suitable for rough machining with high metal removal rate to finish machining with high surface quality.

### Complete diameter range


Minimum diameter of 0.3mm for machining of the smallest parts.

Tool type: GM-4E-D10.0  
 Dimensions: Ø10.0mm  
 Workpiece material: NAK80(40HRC)  
 Rotating speed: 3200r/min (100m/min)  
 Feed rate: 640mm/min(0.2mm/r)  
 Axial cutting depth:  $a_p=15\text{mm}$   
 Radial cutting depth:  $a_e=1.0\text{mm}$   
 Cutting style: side milling (down milling)  
 Cooling system: air blow  
 Machine tool: MIKRON UCP 1000



### Cutting edge abrasion and workpiece surface quality

End mill	GM-4E-D10.0	Similar product of company A	Similar product of company B
Cutting length	60m	20m	60m

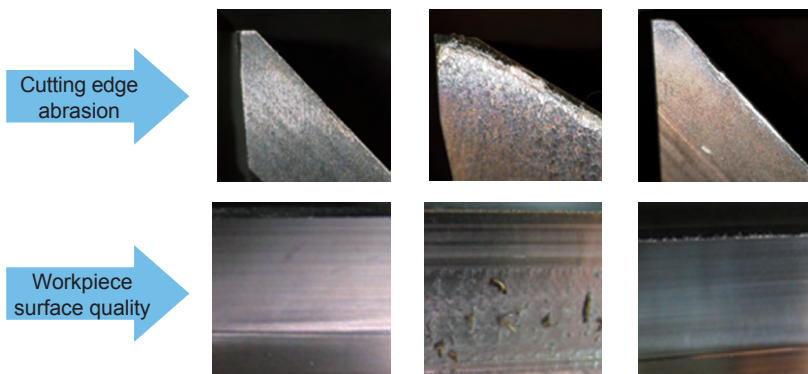

# Multipurpose 3-flute end mills

## GM-3E GM-3EL

Excellent vibration resistance, able to achieve various machining operations such as slot milling, side milling, drilling, etc.!

### GM-3E-D10.0 slot milling 718H(32HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: 718H(32HRC)

Cutting speed: 80(m/min)

Feed rate per tooth: 0.06(mm/tooth)

Axial cutting depth: 5(mm)

Radial cutting depth: 10(mm)

Cooling system: air blow

Milling style: slot milling



Overhang: 35mm

Failure identification:

(A) Severe breakage occurs with a breakage value above 0.2mm.

(B) Even abrasion value of flank reaches 0.1mm.

Either situation is regarded as tool failure.

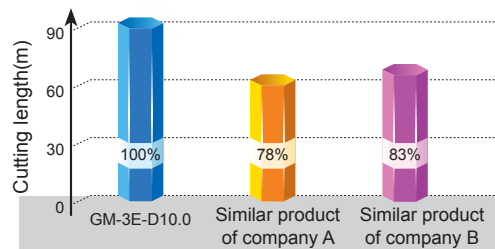

Slot milling cutting length comparison

### GM-3E-D10.0 combined machining 718H(32HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: 718H(32HRC)

Cutting speed: 80(m/min)

Feed rate per tooth: 0.06(mm/tooth)

Axial cutting depth: 5(mm)


Radial cutting depth: 10(mm)

Cooling system: air blow

Milling style: combined cutting

Overhang: 35mm

Overhang: 35mm

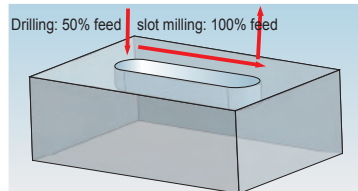

### GM-3E-D6.0 side milling NAK80(37HRC)

Machine tool: MIKRON UCP1000

Tool holder: HSK63-A

Workpiece material: NAK80(37HRC)

Cutting speed: 100(m/min)

Feed rate per tooth: 0.06(mm/tooth)



Axial cutting depth: 9(mm)

Radial cutting depth: 0.6(mm)

Cooling system: air blow

Milling style: side milling (down milling)

Overhang: 22mm

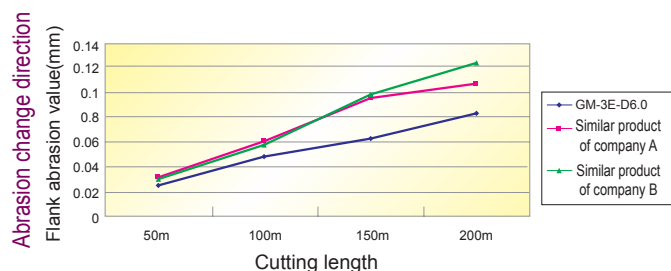

High-efficiency roughing of steel

# GM-4W Corrugated edge end mills



Optimized corrugation specially designed for P-type material with proper control of chips size, improving tool life and stability.



Nano coating with excellent lubrication property can reduce vibration as well as resist wear.

Ultra fine cemented carbide substrate with high toughness can easily achieve heavy roughing.



## End mills for high-efficiency roughing GM-4W-D8.0 cutting die steel NAK55(33HRC)


Machine tool: MIKRON UCP1000  
Tool holder: HSK63-A  
Workpiece material: NAK55(33HRC)  
Cutting speed: 100(m/min)  
Feed rate per tooth: 0.06(mm/tooth)  
Axial cutting depth: 12(mm)  
Radial cutting depth: 4(mm)  
Cooling system: air blow  
Milling style: side milling (down milling)  
Overhang: 30mm

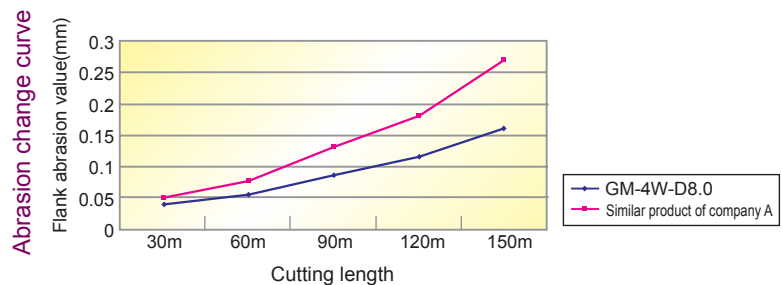

# High-precision R end mill series



GM-4R  
GM-4RL  
GM-2R

High-precision seamless connection of nose and peripheral cutting edge reduces the abrasion at the juncture and improves tool life.

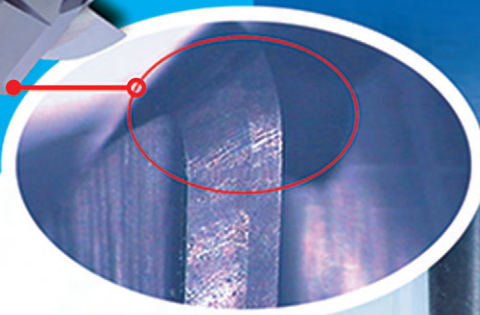

## GM-4R-D6.0R1.0 cavity milling 42CrMo(35HRC)



Machine tool: MIKRON UCP1000  
Tool holder: HSK63-A  
Workpiece material: 42CrMo(35HRC)  
Cutting speed: 100(m/min)  
Feed rate per tooth: 0.06(mm/tooth)  
Axial cutting depth: 0.3(mm)  
Radial cutting depth: 2(mm)  
Cooling system: air blow  
Milling style: cavity milling  
Overhang: 30mm

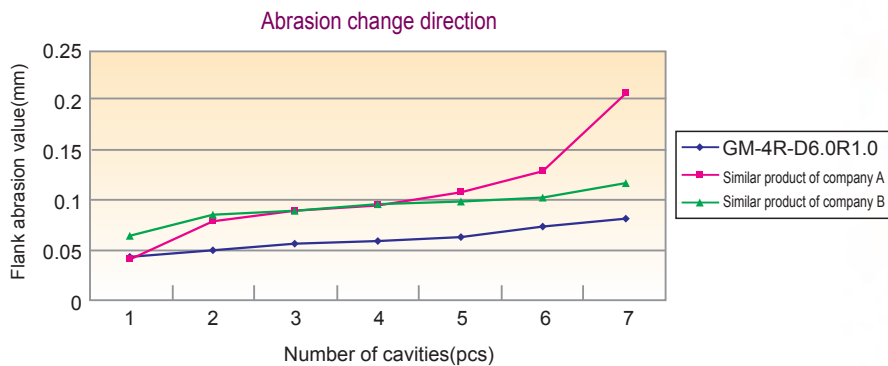

### 2-flute flattened end mills with straight shank



#### GM-2E

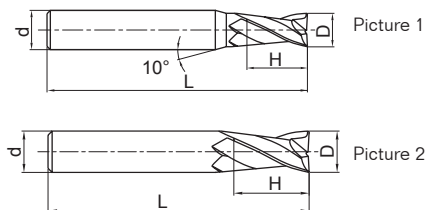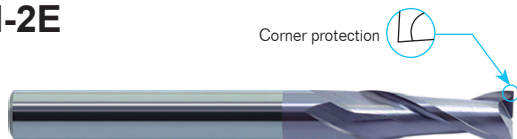

- Very suitable for slot milling.
- Wide application.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-2E-D1.0S	1.0	4	3	50	2	Picture 1	●
GM-2E-D1.5S	1.5	4	4	50	2	Picture 1	●
GM-2E-D2.0S	2.0	4	6	50	2	Picture 1	●
GM-2E-D2.5S	2.5	4	8	50	2	Picture 1	●
GM-2E-D3.0S	3.0	4	8	50	2	Picture 1	●
GM-2E-D4.0S	4.0	4	11	50	2	Picture 2	●
GM-2E-D1.0	1.0	6	3	50	2	Picture 1	●
GM-2E-D1.5	1.5	6	4	50	2	Picture 1	●
GM-2E-D2.0	2.0	6	6	50	2	Picture 1	●
GM-2E-D2.5	2.5	6	8	50	2	Picture 1	●
GM-2E-D3.0	3.0	6	8	50	2	Picture 1	●
GM-2E-D3.5	3.5	6	10	50	2	Picture 1	●
GM-2E-D4.0	4.0	6	11	50	2	Picture 1	●
GM-2E-D4.5	4.5	6	11	50	2	Picture 1	●
GM-2E-D5.0	5.0	6	13	50	2	Picture 1	●
GM-2E-D5.5	5.5	6	16	50	2	Picture 1	●
GM-2E-D6.0	6.0	6	16	50	2	Picture 2	●
GM-2E-D7.0	7.0	8	20	60	2	Picture 1	●
GM-2E-D8.0	8.0	8	20	60	2	Picture 2	●
GM-2E-D9.0	9.0	10	22	75	2	Picture 1	●
GM-2E-D10.0	10.0	10	25	75	2	Picture 2	●
GM-2E-D11.0	11.0	12	26	75	2	Picture 1	●
GM-2E-D12.0	12.0	12	30	75	2	Picture 2	●
GM-2E-D14.0	14.0	14	32	75	2	Picture 2	●
GM-2E-D16.0	16.0	16	45	100	2	Picture 2	●
GM-2E-D18.0	18.0	18	45	100	2	Picture 2	●
GM-2E-D20.0	20.0	20	45	100	2	Picture 2	●

● Stock available ○ Make-to-order

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○	○	○	○	

Code key

B231

Graphics category and identification

B232


Cutting parameters

B427


### 2-flute flattened end mills with straight shank and long cutting edge




#### GM-2EL

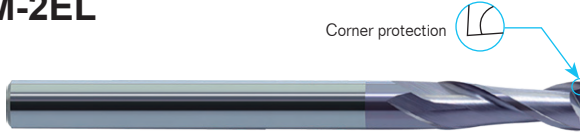

Corner protection




Picture 1



Picture 2

● GM-2E series with long cutting edge.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-2EL-D3.0	3.0	6	12	75	2	Picture 1	●
GM-2EL-D4.0	4.0	6	15	75	2	Picture 1	●
GM-2EL-D5.0	5.0	6	20	75	2	Picture 1	●
GM-2EL-D6.0	6.0	6	20	75	2	Picture 2	●
GM-2EL-D8.0	8.0	8	25	100	2	Picture 2	●
GM-2EL-D10.0	10.0	10	30	100	2	Picture 2	●
GM-2EL-D12.0	12.0	12	35	100	2	Picture 2	●
GM-2EL-D14.0	14.0	14	40	100	2	Picture 2	●
GM-2EL-D16.0	16.0	16	50	150	2	Picture 2	●
GM-2EL-D20.0	20.0	20	55	150	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
●	●	●	○		○	●					

Code key

B231

Graphics category and identification

B232


Cutting parameters

B427


### 3-flute flattened end mills with straight shank




#### GM-3E



Corner protection




Picture 1



Picture 2

- Excellent vibration resistance, able to achieve various machining operations such as slot milling, side milling, drilling, etc.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-3E-D1.0S	1.0	4	3	50	3	Picture 1	○
GM-3E-D1.5S	1.5	4	4	50	3	Picture 1	○
GM-3E-D2.0S	2.0	4	6	50	3	Picture 1	○
GM-3E-D2.5S	2.5	4	8	50	3	Picture 1	○
GM-3E-D3.0S	3.0	4	8	50	3	Picture 1	○
GM-3E-D4.0S	4.0	4	11	50	3	Picture 2	○
GM-3E-D1.0	1.0	6	3	50	3	Picture 1	○
GM-3E-D1.5	1.5	6	4	50	3	Picture 1	○
GM-3E-D2.0	2.0	6	6	50	3	Picture 1	○
GM-3E-D2.5	2.5	6	8	50	3	Picture 1	○
GM-3E-D3.0	3.0	6	8	50	3	Picture 1	○
GM-3E-D3.5	3.5	6	10	50	3	Picture 1	○
GM-3E-D4.0	4.0	6	11	50	3	Picture 1	○
GM-3E-D4.5	4.5	6	11	50	3	Picture 1	○
GM-3E-D5.0	5.0	6	13	50	3	Picture 1	○
GM-3E-D5.5	5.5	6	16	50	3	Picture 1	○
GM-3E-D6.0	6.0	6	16	50	3	Picture 2	○
GM-3E-D7.0	7.0	8	20	60	3	Picture 1	○
GM-3E-D8.0	8.0	8	20	60	3	Picture 2	○
GM-3E-D9.0	9.0	10	22	75	3	Picture 1	○
GM-3E-D10.0	10.0	10	25	75	3	Picture 2	○
GM-3E-D11.0	11.0	12	26	75	3	Picture 1	○
GM-3E-D12.0	12.0	12	30	75	3	Picture 2	○
GM-3E-D14.0	14.0	14	32	75	3	Picture 2	○
GM-3E-D16.0	16.0	16	45	100	3	Picture 2	○
GM-3E-D18.0	18.0	18	45	100	3	Picture 2	○
GM-3E-D20.0	20.0	20	45	100	3	Picture 2	○

● Stock available ○ Make-to-order

#### Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232



Cutting parameters

B428


### 3-flute flattened end mills with straight shank and long cutting edge



#### GM-3EL





Picture 1



Picture 2

● GM-3E series with long cutting edge.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-3EL-D3.0	3.0	6	12	75	3	Picture 1	○
GM-3EL-D4.0	4.0	6	15	75	3	Picture 1	○
GM-3EL-D5.0	5.0	6	20	75	3	Picture 1	○
GM-3EL-D6.0	6.0	6	20	75	3	Picture 2	○
GM-3EL-D8.0	8.0	8	25	100	3	Picture 2	○
GM-3EL-D10.0	10.0	10	30	100	3	Picture 2	○
GM-3EL-D12.0	12.0	12	35	100	3	Picture 2	○
GM-3EL-D14.0	14.0	14	40	100	3	Picture 2	○
GM-3EL-D16.0	16.0	16	50	150	3	Picture 2	○
GM-3EL-D20.0	20.0	20	55	150	3	Picture 2	○

● Stock available ○ Make-to-order


Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel、Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					








### 4-flute flattened end mills with straight shank



#### GM-4E-G





Picture 1



Picture 2

- Very suitable for side milling.
- Wide application.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4E-D1.0S-G	1.0	4	3	50	4	Picture 1	●
GM-4E-D1.5S-G	1.5	4	4	50	4	Picture 1	●
GM-4E-D2.0S-G	2.0	4	6	50	4	Picture 1	●
GM-4E-D2.5S-G	2.5	4	8	50	4	Picture 1	●
GM-4E-D3.0S-G	3.0	4	8	50	4	Picture 1	●
GM-4E-D4.0S-G	4.0	4	11	50	4	Picture 2	●
GM-4E-D1.0-G	1.0	6	3	50	4	Picture 1	●
GM-4E-D1.5-G	1.5	6	4	50	4	Picture 1	●
GM-4E-D2.0-G	2.0	6	6	50	4	Picture 1	●
GM-4E-D2.5-G	2.5	6	8	50	4	Picture 1	●
GM-4E-D3.0-G	3.0	6	8	50	4	Picture 1	●
GM-4E-D3.5-G	3.5	6	10	50	4	Picture 1	●
GM-4E-D4.0-G	4.0	6	11	50	4	Picture 1	●
GM-4E-D4.5-G	4.5	6	11	50	4	Picture 1	●
GM-4E-D5.0-G	5.0	6	13	50	4	Picture 1	●
GM-4E-D5.5-G	5.5	6	16	50	4	Picture 1	●
GM-4E-D6.0-G	6.0	6	16	50	4	Picture 2	●
GM-4E-D7.0-G	7.0	8	20	60	4	Picture 1	●
GM-4E-D8.0-G	8.0	8	20	60	4	Picture 2	●
GM-4E-D9.0-G	9.0	10	22	75	4	Picture 1	●
GM-4E-D10.0-G	10.0	10	25	75	4	Picture 2	●
GM-4E-D11.0-G	11.0	12	26	75	4	Picture 1	●
GM-4E-D12.0-G	12.0	12	30	75	4	Picture 2	●
GM-4E-D14.0-G	14.0	14	32	75	4	Picture 2	●
GM-4E-D16.0-G	16.0	16	45	100	4	Picture 2	●
GM-4E-D18.0-G	18.0	18	45	100	4	Picture 2	●
GM-4E-D20.0-G	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○	○	○	○	

Code key

B231

Graphics category and identification

B232


Cutting parameters

B429


### 4-flute flattened end mills with straight shank and long cutting edge




#### GM-4EL-G



Corner protection




Picture 1



Picture 2

● GM-4E-G series with long cutting edge.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4EL-D3.0-G	3.0	6	12	75	4	Picture 1	○
GM-4EL-D4.0-G	4.0	6	15	75	4	Picture 1	○
GM-4EL-D5.0-G	5.0	6	20	75	4	Picture 1	○
GM-4EL-D6.0-G	6.0	6	20	75	4	Picture 2	○
GM-4EL-D8.0-G	8.0	8	25	100	4	Picture 2	○
GM-4EL-D10.0-G	10.0	10	30	100	4	Picture 2	○
GM-4EL-D12.0-G	12.0	12	35	100	4	Picture 2	○
GM-4EL-D14.0-G	14.0	14	40	100	4	Picture 2	○
GM-4EL-D16.0-G	16.0	16	50	150	4	Picture 2	○
GM-4EL-D20.0-G	20.0	20	55	150	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable




Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key B231 Graphics category and identification B232 Cutting parameters B429



### 4-flute flattened end mills with straight shank



#### GM-4E



- Very suitable for side milling and shallow slot machining.
- Wide application.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4E-D1.0S	1.0	4	3	50	4	Picture 1	●
GM-4E-D1.5S	1.5	4	4	50	4	Picture 1	●
GM-4E-D2.0S	2.0	4	6	50	4	Picture 1	●
GM-4E-D2.5S	2.5	4	8	50	4	Picture 1	●
GM-4E-D3.0S	3.0	4	8	50	4	Picture 1	●
GM-4E-D4.0S	4.0	4	11	50	4	Picture 2	●
GM-4E-D1.0	1.0	6	3	50	4	Picture 1	●
GM-4E-D1.5	1.5	6	4	50	4	Picture 1	●
GM-4E-D2.0	2.0	6	6	50	4	Picture 1	●
GM-4E-D2.5	2.5	6	8	50	4	Picture 1	●
GM-4E-D3.0	3.0	6	8	50	4	Picture 1	●
GM-4E-D3.5	3.5	6	10	50	4	Picture 1	●
GM-4E-D4.0	4.0	6	11	50	4	Picture 1	●
GM-4E-D4.5	4.5	6	11	50	4	Picture 1	●
GM-4E-D5.0	5.0	6	13	50	4	Picture 1	●
GM-4E-D5.5	5.5	6	16	50	4	Picture 1	●
GM-4E-D6.0	6.0	6	16	50	4	Picture 2	●
GM-4E-D7.0	7.0	8	20	60	4	Picture 1	●
GM-4E-D8.0	8.0	8	20	60	4	Picture 2	●
GM-4E-D9.0	9.0	10	22	75	4	Picture 1	●
GM-4E-D10.0	10.0	10	25	75	4	Picture 2	●
GM-4E-D11.0	11.0	12	26	75	4	Picture 1	●
GM-4E-D12.0	12.0	12	30	75	4	Picture 2	●
GM-4E-D14.0	14.0	14	32	75	4	Picture 2	●
GM-4E-D16.0	16.0	16	45	100	4	Picture 2	●
GM-4E-D18.0	18.0	18	45	100	4	Picture 2	●
GM-4E-D20.0	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

#### Applicable workpiece material table ●Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
●	●	●	○		○	●					

Code key

B231

Graphics category and identification

B232


Cutting parameters

B430



### 4-flute flattened end mills with straight shank and long cutting edge




#### GM-4EL

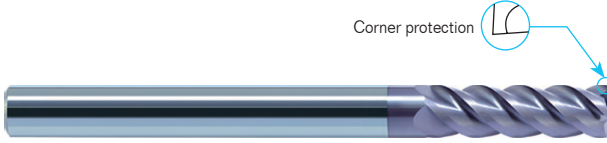

Corner protection



● GM-4E series with long cutting edge.



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4EL-D3.0	3.0	6	12	75	4	Picture 1	●
GM-4EL-D4.0	4.0	6	15	75	4	Picture 1	●
GM-4EL-D5.0	5.0	6	20	75	4	Picture 1	●
GM-4EL-D6.0	6.0	6	20	75	4	Picture 2	●
GM-4EL-D8.0	8.0	8	25	100	4	Picture 2	●
GM-4EL-D10.0	10.0	10	30	100	4	Picture 2	●
GM-4EL-D12.0	12.0	12	35	100	4	Picture 2	●
GM-4EL-D14.0	14.0	14	40	100	4	Picture 2	●
GM-4EL-D16.0	16.0	16	50	150	4	Picture 2	●
GM-4EL-D20.0	20.0	20	55	150	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○ Very suitable ○ Suitable



Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key **B231** Graphics category and identification **B232** Cutting parameters **B430**


### 6-flute flattened end mills with straight shank



#### GM-6E



- Perfect rigidity, very suitable for side finish machining.
- High speed, high feed rate machining applicable.



Type	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-6E-D6.0	6.0	6	18	60	6	●
GM-6E-D8.0	8.0	8	20	60	6	●
GM-6E-D10.0	10.0	10	30	75	6	●
GM-6E-D12.0	12.0	12	32	75	6	●
GM-6E-D16.0	16.0	16	40	100	6	●
GM-6E-D20.0	20.0	20	45	100	6	●

● Stock available ○ Make-to-order

Indexable  
milling tools

Solid carbide  
end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232



Cutting parameters

B431

### 6-flute flattened end mills with straight shank and long cutting edge



#### GM-6EL

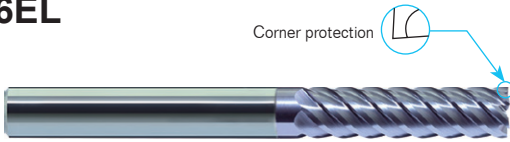

● GM-6E series with long cutting edge.



Type	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-6EL-D6.0	6.0	6	24	75	6	●
GM-6EL-D8.0	8.0	8	32	75	6	●
GM-6EL-D10.0	10.0	10	40	100	6	●
GM-6EL-D12.0	12.0	12	45	100	6	●
GM-6EL-D16.0	16.0	16	64	150	6	●
GM-6EL-D20.0	20.0	20	75	150	6	●

● Stock available ○ Make-to-order


Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					




### 2-flute flattened end mills with straight shank, long neck and short cutting edge





Deep flattened slot

#### GM-2EP



● Suitable for narrow slot milling or milling of fine parts that could generate interference.



Type	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d1	L		
GM-2EP-D0.5-M04	0.5	4	0.7	4	0.45	50	2	●
GM-2EP-D0.5-M06	0.5	4	0.7	6	0.45	50	2	●
GM-2EP-D0.5-M08	0.5	4	0.7	8	0.45	50	2	●
GM-2EP-D0.8-M04	0.8	4	1.2	4	0.75	50	2	●
GM-2EP-D0.8-M06	0.8	4	1.2	6	0.75	50	2	●
GM-2EP-D0.8-M08	0.8	4	1.2	8	0.75	50	2	●
GM-2EP-D0.8-M10	0.8	4	1.2	10	0.75	50	2	●
GM-2EP-D1.0-M04	1.0	4	1.5	4	0.95	50	2	●
GM-2EP-D1.0-M06	1.0	4	1.5	6	0.95	50	2	●
GM-2EP-D1.0-M08	1.0	4	1.5	8	0.95	50	2	●
GM-2EP-D1.0-M10	1.0	4	1.5	10	0.95	50	2	●
GM-2EP-D1.0-M12	1.0	4	1.5	12	0.95	50	2	●
GM-2EP-D1.0-M14	1.0	4	1.5	14	0.95	50	2	●
GM-2EP-D1.2-M06	1.2	4	1.8	6	1.15	50	2	●
GM-2EP-D1.2-M08	1.2	4	1.8	8	1.15	50	2	●
GM-2EP-D1.2-M10	1.2	4	1.8	10	1.15	50	2	●
GM-2EP-D1.2-M12	1.2	4	1.8	12	1.15	50	2	●
GM-2EP-D1.5-M06	1.5	4	2.3	6	1.45	50	2	●
GM-2EP-D1.5-M08	1.5	4	2.3	8	1.45	50	2	●
GM-2EP-D1.5-M10	1.5	4	2.3	10	1.45	50	2	●
GM-2EP-D1.5-M12	1.5	4	2.3	12	1.45	50	2	●
GM-2EP-D1.5-M14	1.5	4	2.3	14	1.45	50	2	●
GM-2EP-D2.0-M06	2.0	4	3.0	6	1.95	50	2	●
GM-2EP-D2.0-M08	2.0	4	3.0	8	1.95	50	2	●
GM-2EP-D2.0-M10	2.0	4	3.0	10	1.95	50	2	●
GM-2EP-D2.0-M12	2.0	4	3.0	12	1.95	50	2	●

● Stock available ○ Make-to-order

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232

Cutting parameters

B433-B434

### 2-flute flattened end mills with straight shank, long neck and short cutting edge





Deep flattened slot

### GM-2EP



● Suitable for narrow slot milling or milling of fine parts that could generate interference.



Type	Basic dimension(mm)						Number of teeth Z	Stock
	D	d	H	M	d <sub>1</sub>	L		
GM-2EP-D2.0-M14	2.0	4	3.0	14	1.95	50	2	●
GM-2EP-D2.0-M16	2.0	4	3.0	16	1.95	50	2	●
GM-2EP-D2.5-M08	2.5	4	3.7	8	2.4	50	2	●
GM-2EP-D2.5-M10	2.5	4	3.7	10	2.4	50	2	●
GM-2EP-D2.5-M12	2.5	4	3.7	12	2.4	50	2	●
GM-2EP-D2.5-M14	2.5	4	3.7	14	2.4	50	2	●
GM-2EP-D2.5-M16	2.5	4	3.7	16	2.4	60	2	●
GM-2EP-D2.5-M18	2.5	4	3.7	18	2.4	60	2	●
GM-2EP-D2.5-M20	2.5	4	3.7	20	2.4	60	2	●
GM-2EP-D3.0-M06	3.0	6	4.5	6	2.85	50	2	●
GM-2EP-D3.0-M08	3.0	6	4.5	8	2.85	50	2	●
GM-2EP-D3.0-M10	3.0	6	4.5	10	2.85	50	2	●
GM-2EP-D3.0-M12	3.0	6	4.5	12	2.85	50	2	●
GM-2EP-D3.0-M14	3.0	6	4.5	14	2.85	60	2	●
GM-2EP-D3.0-M16	3.0	6	4.5	16	2.85	60	2	●
GM-2EP-D3.0-M18	3.0	6	4.5	18	2.85	60	2	●
GM-2EP-D3.0-M20	3.0	6	4.5	20	2.85	60	2	●
GM-2EP-D4.0-M12	4.0	6	6.0	12	3.85	50	2	●
GM-2EP-D4.0-M16	4.0	6	6.0	16	3.85	60	2	●
GM-2EP-D4.0-M20	4.0	6	6.0	20	3.85	60	2	●
GM-2EP-D4.0-M25	4.0	6	6.0	25	3.85	60	2	●
GM-2EP-D5.0-M16	5.0	6	7.5	16	4.85	60	2	●
GM-2EP-D5.0-M25	5.0	6	7.5	25	4.85	70	2	●

● Stock available ○ Make-to-order

### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○	○	○	○	

Code key

B231

Graphics category and identification

B232

Cutting parameters


B433-B434




### 2-flute flattened end mills with straight shank and tiny diameter



#### GM-2ES



Tiny diameter end mills can fully display high speed and high precision performances of machining center, often used for machining of precision components such as electronic part etc.



Type	Basic dimension(mm)				Number of teeth Z	Stock
	D	d	H	L		
GM-2ES-D0.3	0.3	4	0.6	50	2	●
GM-2ES-D0.4	0.4	4	0.8	50	2	●
GM-2ES-D0.5	0.5	4	1.0	50	2	●
GM-2ES-D0.6	0.6	4	1.2	50	2	●
GM-2ES-D0.7	0.7	4	1.4	50	2	●
GM-2ES-D0.8	0.8	4	1.6	50	2	●
GM-2ES-D0.9	0.9	4	1.8	50	2	●
GM-2ES-D1.0	1.0	4	2.0	50	2	●
GM-2ES-D1.1	1.1	4	2.0	50	2	●
GM-2ES-D1.2	1.2	4	2.5	50	2	●
GM-2ES-D1.3	1.3	4	2.5	50	2	●
GM-2ES-D1.4	1.4	4	3.0	50	2	●
GM-2ES-D1.5	1.5	4	3.0	50	2	●
GM-2ES-D1.6	1.6	4	3.5	50	2	●
GM-2ES-D1.7	1.7	4	3.5	50	2	●
GM-2ES-D1.8	1.8	4	4.0	50	2	●
GM-2ES-D1.9	1.9	4	4.0	50	2	●
GM-2ES-D2.0	2.0	4	4.0	50	2	●
GM-2ES-D2.1	2.1	4	4.0	50	2	●
GM-2ES-D2.2	2.2	4	4.5	50	2	●
GM-2ES-D2.3	2.3	4	4.5	50	2	●
GM-2ES-D2.4	2.4	4	5.0	50	2	●
GM-2ES-D2.5	2.5	4	5.0	50	2	●
GM-2ES-D2.6	2.6	4	5.0	50	2	●
GM-2ES-D2.7	2.7	4	5.5	50	2	●
GM-2ES-D2.8	2.8	4	5.5	50	2	●
GM-2ES-D2.9	2.9	4	6.0	50	2	●
GM-2ES-D3.0	3.0	4	6.0	50	2	●

● Stock available ○ Make-to-order

#### Applicable workpiece material table

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232

Cutting parameters

B435

GM series for general machining



## 2-flute ball nose end mills with straight shank



### GM-2B



- For profile milling, high speed machining applicable.
- Wide application.

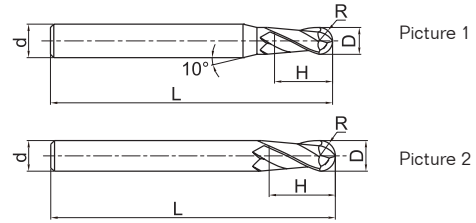

Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2B-R0.5S	1.0	0.5	4	2	50	2	Picture 1	●
GM-2B-R0.75S	1.5	0.75	4	3	50	2	Picture 1	●
GM-2B-R1.0S	2.0	1.0	4	4	50	2	Picture 1	●
GM-2B-R1.25S	2.5	1.25	4	5	50	2	Picture 1	●
GM-2B-R1.5S	3.0	1.5	4	6	50	2	Picture 1	●
GM-2B-R2.0S	4.0	2.0	4	8	50	2	Picture 2	●
GM-2B-R0.5	1.0	0.5	6	2	50	2	Picture 1	●
GM-2B-R0.75	1.5	0.75	6	3	50	2	Picture 1	●
GM-2B-R1.0	2.0	1.0	6	4	50	2	Picture 1	●
GM-2B-R1.25	2.5	1.25	6	5	50	2	Picture 1	●
GM-2B-R1.5	3.0	1.5	6	6	50	2	Picture 1	●
GM-2B-R1.75	3.5	1.75	6	8	50	2	Picture 1	●
GM-2B-R2.0	4.0	2.0	6	8	50	2	Picture 1	●
GM-2B-R2.5	5.0	2.5	6	10	50	2	Picture 1	●
GM-2B-R2.75	5.5	2.75	6	12	50	2	Picture 1	●
GM-2B-R3.0	6.0	3.0	6	12	50	2	Picture 2	●
GM-2B-R3.5	7.0	3.5	8	14	60	2	Picture 1	●
GM-2B-R4.0	8.0	4.0	8	16	60	2	Picture 2	●
GM-2B-R4.5	9.0	4.5	10	18	75	2	Picture 1	●
GM-2B-R5.0	10	5.0	10	20	75	2	Picture 2	●
GM-2B-R6.0	12	6.0	12	24	75	2	Picture 2	●
GM-2B-R7.0	14	7.0	14	28	75	2	Picture 2	●
GM-2B-R8.0	16	8.0	16	32	100	2	Picture 2	●
GM-2B-R10.0	20	10.0	20	40	100	2	Picture 2	●

● Stock available ○ Make-to-order

### Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
●	●	●	○			○	●				



Code key **B231** Graphics category and identification **B232** Cutting parameters **B436**

Indexable milling tools  
Solid carbide end mills  
GM series




### 2-flute ball nose end mills with straight shank



#### GM-2BL



● GM-2B series with long shank.



Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2BL-R1.0	2.0	1.0	6	4	75	2	Picture 1	●
GM-2BL-R1.25	2.5	1.25	6	5	75	2	Picture 1	●
GM-2BL-R1.5	3.0	1.5	6	6	75	2	Picture 1	●
GM-2BL-R1.75	3.5	1.75	6	8	75	2	Picture 1	●
GM-2BL-R2.0	4.0	2.0	6	8	75	2	Picture 1	●
GM-2BL-R2.5	5.0	2.5	6	10	75	2	Picture 1	●
GM-2BL-R2.75	5.5	2.75	6	12	75	2	Picture 1	●
GM-2BL-R3.0	6.0	3.0	6	12	75	2	Picture 2	●
GM-2BL-R3.5	7.0	3.5	8	14	75	2	Picture 1	●
GM-2BL-R4.0	8.0	4.0	8	16	100	2	Picture 2	●
GM-2BL-R4.5	9.0	4.5	10	18	100	2	Picture 1	●
GM-2BL-R5.0	10.0	5.0	10	20	100	2	Picture 2	●
GM-2BL-R6.0	12.0	6.0	12	24	100	2	Picture 2	●
GM-2BL-R7.0	14.0	7.0	14	28	100	2	Picture 2	●
GM-2BL-R8.0	16.0	8.0	16	32	150	2	Picture 2	●
GM-2BL-R10.0	20.0	10.0	20	40	150	2	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232

Cutting parameters

B436



### 4-flute ball nose end mills with straight shank



#### GM-4B



● 4-flute ball nose end mill can operate with higher feed speed and machining efficiency, extending too life in machining high-hardness workpiece.

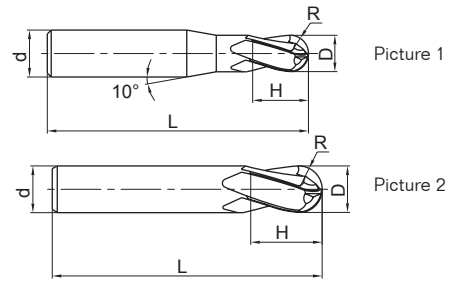


Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4B-R1.5	3.0	1.5	6	6	50	4	Picture 1	●
GM-4B-R2.0	4.0	2.0	6	8	50	4	Picture 1	●
GM-4B-R2.5	5.0	2.5	6	10	50	4	Picture 1	●
GM-4B-R3.0	6.0	3.0	6	12	50	4	Picture 2	●
GM-4B-R4.0	8.0	4.0	8	16	60	4	Picture 2	●
GM-4B-R5.0	10.0	5.0	10	20	75	4	Picture 2	●
GM-4B-R6.0	12.0	6.0	12	24	75	4	Picture 2	●
GM-4B-R7.0	14.0	7.0	14	28	75	4	Picture 2	●
GM-4B-R8.0	16.0	8.0	16	32	100	4	Picture 2	●
GM-4B-R9.0	18.0	9.0	18	36	100	4	Picture 2	●
GM-4B-R10.0	20.0	10.0	20	40	100	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools  
Solid carbide end mills  
GM series

#### Applicable workpiece material table ○Very suitable ○Suitable


Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					



### 4-flute ball nose end mills with straight and long shank



#### GM-4BL

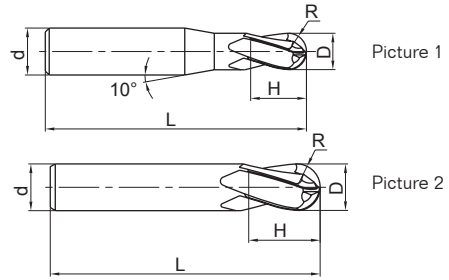

- GM-4B series with long shank.



Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4BL-R1.5	3.0	1.5	6	6	75	4	Picture 1	○
GM-4BL-R2.0	4.0	2.0	6	8	75	4	Picture 1	○
GM-4BL-R2.5	5.0	2.5	6	10	75	4	Picture 1	○
GM-4BL-R3.0	6.0	3.0	6	12	75	4	Picture 2	○
GM-4BL-R4.0	8.0	4.0	8	16	100	4	Picture 2	○
GM-4BL-R5.0	10.0	5.0	10	20	100	4	Picture 2	○
GM-4BL-R6.0	12.0	6.0	12	24	100	4	Picture 2	○
GM-4BL-R7.0	14.0	7.0	14	28	100	4	Picture 2	○
GM-4BL-R8.0	16.0	8.0	16	32	150	4	Picture 2	○
GM-4BL-R9.0	18.0	9.0	18	36	150	4	Picture 2	○
GM-4BL-R10.0	20.0	10.0	20	40	150	4	Picture 2	○

● Stock available ○ Make-to-order

Indexable  
milling tools

Solid carbide  
end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232


Cutting parameters

B437




### 2-flute tiny ball nose end mills with straight shank



### GM-2BS



● Tiny diameter end mills can fully display high speed and high precision performances of machining center, often used for machining of precision components such as electronic part etc.



Type	Basic dimension(mm)					Number of teeth Z	Stock
	D	R	d	H	L		
GM-2BS-R0.15	0.30	0.15	4	0.5	50	2	●
GM-2BS-R0.20	0.40	0.20	4	0.6	50	2	●
GM-2BS-R0.25	0.50	0.25	4	0.8	50	2	●
GM-2BS-R0.30	0.60	0.30	4	0.9	50	2	●
GM-2BS-R0.35	0.70	0.35	4	1.0	50	2	●
GM-2BS-R0.40	0.80	0.40	4	1.2	50	2	●
GM-2BS-R0.45	0.90	0.45	4	1.3	50	2	●
GM-2BS-R0.50	1.00	0.50	4	1.5	50	2	●
GM-2BS-R0.60	1.20	0.60	4	1.8	50	2	●
GM-2BS-R0.70	1.40	0.70	4	2.0	50	2	●
GM-2BS-R0.75	1.50	0.75	4	2.3	50	2	●
GM-2BS-R0.80	1.60	0.80	4	2.5	50	2	●
GM-2BS-R0.90	1.80	0.90	4	2.7	50	2	●
GM-2BS-R1.00	2.00	1.00	4	3.0	50	2	●
GM-2BS-R1.25	2.50	1.25	4	3.7	50	2	●
GM-2BS-R1.50	3.00	1.50	4	4.5	50	2	●

● Stock available ○ Make-to-order


Indexable milling tools

Solid carbide end mills

GM series

### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					




2-flute ball nose end mills with straight shank, long neck and short cutting edge






Deep ball nose slot

### GM-2BP



- Suitable for machining narrow slot and free-form surface.



Type	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	H	d <sub>1</sub>	M	d	L		
GM-2BP-R0.25-M04	0.5	0.25	0.7	0.45	4	4	50	2	●
GM-2BP-R0.25-M06	0.5	0.25	0.7	0.45	6	4	50	2	●
GM-2BP-R0.3-M04	0.6	0.3	0.9	0.55	4	4	50	2	●
GM-2BP-R0.3-M06	0.6	0.3	0.9	0.55	6	4	50	2	●
GM-2BP-R0.3-M08	0.6	0.3	0.9	0.55	8	4	50	2	●
GM-2BP-R0.4-M04	0.8	0.4	1.2	0.75	4	4	50	2	●
GM-2BP-R0.4-M06	0.8	0.4	1.2	0.75	6	4	50	2	●
GM-2BP-R0.4-M08	0.8	0.4	1.2	0.75	8	4	50	2	●
GM-2BP-R0.4-M10	0.8	0.4	1.2	0.75	10	4	50	2	●
GM-2BP-R0.5-M04	1.0	0.5	1.5	0.95	4	4	50	2	●
GM-2BP-R0.5-M06	1.0	0.5	1.5	0.95	6	4	50	2	●
GM-2BP-R0.5-M08	1.0	0.5	1.5	0.95	8	4	50	2	●
GM-2BP-R0.5-M10	1.0	0.5	1.5	0.95	10	4	50	2	●
GM-2BP-R0.5-M12	1.0	0.5	1.5	0.95	12	4	50	2	●
GM-2BP-R0.6-M06	1.2	0.6	1.8	1.15	6	4	50	2	●
GM-2BP-R0.6-M08	1.2	0.6	1.8	1.15	8	4	50	2	●
GM-2BP-R0.6-M12	1.2	0.6	1.8	1.15	12	4	50	2	●
GM-2BP-R0.6-M16	1.2	0.6	1.8	1.15	16	4	50	2	●
GM-2BP-R0.75-M08	1.5	0.75	2.3	1.45	8	4	50	2	●
GM-2BP-R0.75-M12	1.5	0.75	2.3	1.45	12	4	50	2	●
GM-2BP-R0.75-M16	1.5	0.75	2.3	1.45	16	4	50	2	●
GM-2BP-R1.0-M06	2.0	1.0	3.0	1.95	6	4	50	2	●
GM-2BP-R1.0-M08	2.0	1.0	3.0	1.95	8	4	50	2	●
GM-2BP-R1.0-M10	2.0	1.0	3.0	1.95	10	4	50	2	●

● Stock available ○ Make-to-order

### Applicable workpiece material table

● Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
●	●	●	○			○	●				

Code key

B231

Graphics category and identification

B23


Cutting parameters

B439-B440




### 2-flute ball nose end mills with straight shank, long neck and short cutting edge



#### GM-2BP

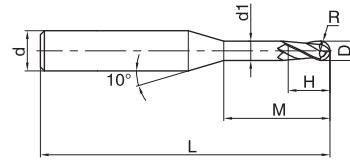

- Suitable for machining narrow slot and free-form surface.



Type	Basic dimension(mm)							Number of teeth Z	Stock
	D	R	H	d <sub>1</sub>	M	d	L		
GM-2BP-R1.0-M12	2.0	1.0	3.0	1.95	12	4	50	2	●
GM-2BP-R1.0-M16	2.0	1.0	3.0	1.95	16	4	50	2	●
GM-2BP-R1.0-M20	2.0	1.0	3.0	1.95	20	4	50	2	●
GM-2BP-R1.25-M08	2.5	1.25	3.7	2.4	8	4	50	2	●
GM-2BP-R1.25-M12	2.5	1.25	3.7	2.4	12	4	50	2	●
GM-2BP-R1.25-M16	2.5	1.25	3.7	2.4	16	4	60	2	●
GM-2BP-R1.25-M20	2.5	1.25	3.7	2.4	20	4	60	2	●
GM-2BP-R1.5-M08	3.0	1.5	4.5	2.85	8	6	50	2	●
GM-2BP-R1.5-M10	3.0	1.5	4.5	2.85	10	6	50	2	●
GM-2BP-R1.5-M12	3.0	1.5	4.5	2.85	12	6	50	2	●
GM-2BP-R1.5-M16	3.0	1.5	4.5	2.85	16	6	60	2	●
GM-2BP-R1.5-M20	3.0	1.5	4.5	2.85	20	6	60	2	●
GM-2BP-R2.0-M10	4.0	2.0	6.0	3.85	10	6	60	2	●
GM-2BP-R2.0-M16	4.0	2.0	6.0	3.85	16	6	60	2	●
GM-2BP-R2.0-M20	4.0	2.0	6.0	3.85	20	6	60	2	●
GM-2BP-R2.0-M25	4.0	2.0	6.0	3.85	25	6	60	2	●
GM-2BP-R2.5-M16	5.0	2.5	7.5	4.85	16	6	60	2	●
GM-2BP-R2.5-M25	5.0	2.5	7.5	4.85	25	6	70	2	●

● Stock available ○ Make-to-order

Indexable milling tools  
Solid carbide end mills  
GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					


Code key B231 Graphics category and identification B232 Cutting parameters B439-B440







### 2-flute R end mills with straight shank



#### GM-2R



- Wide applications, applicable for several machining styles.



Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-2R-D1.0R0.2	1.0	0.2	4	3	50	2	Picture 1	●
GM-2R-D1.5R0.2	1.5	0.2	4	4	50	2	Picture 1	●
GM-2R-D2.0R0.2	2.0	0.2	4	6	50	2	Picture 1	●
GM-2R-D2.0R0.5	2.0	0.5	4	6	50	2	Picture 1	●
GM-2R-D2.5R0.2	2.5	0.2	4	8	50	2	Picture 1	●
GM-2R-D2.5R0.5	2.5	0.5	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.2	3.0	0.2	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.3	3.0	0.3	4	8	50	2	Picture 1	●
GM-2R-D3.0R0.5	3.0	0.5	4	8	50	2	Picture 1	●
GM-2R-D4.0R0.2	4.0	0.2	4	11	50	2	Picture 2	●
GM-2R-D4.0R0.3	4.0	0.3	4	11	50	2	Picture 2	●
GM-2R-D4.0R0.5	4.0	0.5	4	11	50	2	Picture 2	●
GM-2R-D4.0R1.0	4.0	1.0	4	11	50	2	Picture 2	●
GM-2R-D5.0R0.3	5.0	0.3	6	13	50	2	Picture 1	●
GM-2R-D5.0R0.5	5.0	0.5	6	13	50	2	Picture 1	●
GM-2R-D5.0R1.0	5.0	1.0	6	13	50	2	Picture 1	●
GM-2R-D6.0R0.3	6.0	0.3	6	16	50	2	Picture 2	●
GM-2R-D6.0R0.5	6.0	0.5	6	16	50	2	Picture 2	●
GM-2R-D6.0R1.0	6.0	1.0	6	16	50	2	Picture 2	●
GM-2R-D8.0R0.3	8.0	0.3	8	20	60	2	Picture 2	●
GM-2R-D8.0R0.5	8.0	0.5	8	20	60	2	Picture 2	●
GM-2R-D8.0R1.0	8.0	1.0	8	20	60	2	Picture 2	●
GM-2R-D10.0R0.5	10.0	0.5	10	25	75	2	Picture 2	●
GM-2R-D10.0R1.0	10.0	1.0	10	25	75	2	Picture 2	●
GM-2R-D10.0R1.5	10.0	1.5	10	25	75	2	Picture 2	●
GM-2R-D10.0R2.0	10.0	2.0	10	25	75	2	Picture 2	●
GM-2R-D12.0R0.5	12.0	0.5	12	30	75	2	Picture 2	●
GM-2R-D12.0R1.0	12.0	1.0	12	30	75	2	Picture 2	●
GM-2R-D12.0R1.5	12.0	1.5	12	30	75	2	Picture 2	●
GM-2R-D12.0R2.0	12.0	2.0	12	30	75	2	Picture 2	●

#### Applicable workpiece material table

● Stock available ○ Make-to-order

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○	○	○	○	○	○	○	○	

Code key

B231

Graphics category and identification

B232

Cutting parameters

B441

## GM series for general machining





### 4-flute R end mills with straight shank



### GM-4R



- Wide applications, applicable for several machining styles.



Type	Basic dimension(mm)					Number of teeth Z	Geometry	Stock
	D	R	d	H	L			
GM-4R-D3.0R0.2	3.0	0.2	4	8	50	4	Picture 1	●
GM-4R-D4.0R0.3	4.0	0.3	4	10	50	4	Picture 2	●
GM-4R-D4.0R0.5	4.0	0.5	4	10	50	4	Picture 2	●
GM-4R-D5.0R0.5	5.0	0.5	6	13	50	4	Picture 1	●
GM-4R-D5.0R1.0	5.0	1.0	6	13	50	4	Picture 1	●
GM-4R-D6.0R0.5	6.0	0.5	6	16	50	4	Picture 2	●
GM-4R-D6.0R1.0	6.0	1.0	6	16	50	4	Picture 2	●
GM-4R-D8.0R0.5	8.0	0.5	8	20	60	4	Picture 2	●
GM-4R-D8.0R1.0	8.0	1.0	8	20	60	4	Picture 2	●
GM-4R-D10.0R0.5	10.0	0.5	10	25	75	4	Picture 2	●
GM-4R-D10.0R1.0	10.0	1.0	10	25	75	4	Picture 2	●
GM-4R-D10.0R2.0	10.0	2.0	10	25	75	4	Picture 2	●
GM-4R-D10.0R3.0	10.0	3.0	10	25	75	4	Picture 2	●
GM-4R-D12.0R0.5	12.0	0.5	12	30	75	4	Picture 2	●
GM-4R-D12.0R1.0	12.0	1.0	12	30	75	4	Picture 2	●
GM-4R-D12.0R2.0	12.0	2.0	12	30	75	4	Picture 2	●
GM-4R-D12.0R3.0	12.0	3.0	12	30	75	4	Picture 2	●

● Stock available ○ Make-to-order

### Applicable workpiece material table

◎ Very suitable ○ Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
◎	◎	◎	○			○	◎				

Code key

B231

Graphics category and identification

B232



Cutting parameters

B442



### 4-flute R end mills with straight and long shank



#### GM-4RL

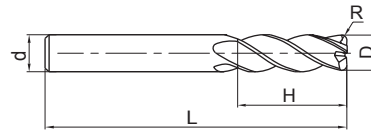

● GM-4R series with long shank.



Type	Basic dimension(mm)					Number of teeth Z	Stock
	D	R	d	H	L		
GM-4RL-D6.0R0.5	6.0	0.5	6	16	75	4	●
GM-4RL-D6.0R1.0	6.0	1.0	6	16	75	4	●
GM-4RL-D8.0R0.5	8.0	0.5	8	20	100	4	●
GM-4RL-D8.0R1.0	8.0	1.0	8	20	100	4	●
GM-4RL-D10.0R0.5	10.0	0.5	10	25	100	4	●
GM-4RL-D10.0R1.0	10.0	1.0	10	25	100	4	●
GM-4RL-D10.0R2.0	10.0	2.0	10	25	100	4	●
GM-4RL-D12.0R0.5	12.0	0.5	12	30	100	4	●
GM-4RL-D12.0R1.0	12.0	1.0	12	30	100	4	●
GM-4RL-D12.0R2.0	12.0	2.0	12	30	100	4	●
GM-4RL-D16.0R1.0	16.0	1.0	16	45	150	4	●
GM-4RL-D16.0R2.0	16.0	2.0	16	45	150	4	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key

B231

Graphics category and identification

B232



Cutting parameters

B442


### 4-flute flattened end mills with straight shank and corrugated edges



#### GM-4W

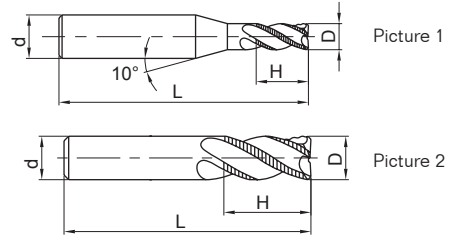

- Very suitable for high-efficiency rough machining.



D	D < 6	0 ~ -0.048	6 < D < 10	0 ~ -0.058
D	10 < D < 18	0 ~ -0.07	18 < D	0 ~ -0.084



Type	Basic dimension(mm)				Number of teeth Z	Geometry	Stock
	D	d	H	L			
GM-4W-D6.0	6.0	6	16	50	4	Picture 2	●
GM-4W-D7.0	7.0	8	20	60	4	Picture 1	●
GM-4W-D8.0	8.0	8	20	60	4	Picture 2	●
GM-4W-D9.0	9.0	10	22	75	4	Picture 1	●
GM-4W-D10.0	10.0	10	25	75	4	Picture 2	●
GM-4W-D11.0	11.0	12	26	75	4	Picture 1	●
GM-4W-D12.0	12.0	12	30	75	4	Picture 2	●
GM-4W-D16.0	16.0	16	45	100	4	Picture 2	●
GM-4W-D20.0	20.0	20	45	100	4	Picture 2	●

● Stock available ○ Make-to-order

Indexable milling tools

Solid carbide end mills

GM series

#### Applicable workpiece material table ○Very suitable ○Suitable

Workpiece material											
Carbon steel	Alloy steel	Pre-hardened steel, Hardened steel				Stainless steel	Cast iron, Nodular cast iron	Copper alloy	Aluminum alloy	Titanium alloy	Heat resistant alloy
		~40HRC	~50HRC	~55HRC	~68HRC						
○	○	○	○		○	○					

Code key **B231** Graphics category and identification **B232** Cutting parameters **B443-B444**